


Typical Information supplied with Estimates

Working within Conquest the Estimator can see

Ref	Description	Types	Quan...	Unit	Rate	Extension	Flags
1 A	F10 Brickwork Blockwork		43	m2	44.64	1919.52	
	Class B Engineering bricks below DPC over 300mm wide						

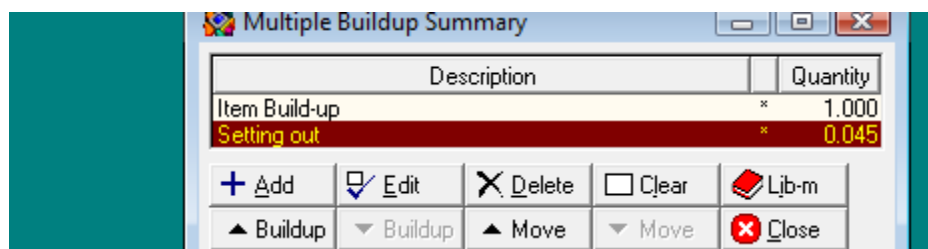

Two Parts (Or Multiple) Rates to the Build up

Description	Quantity	Rate	Unit	Price
Bricklayer	* 1.2000	17.000	Hour	20.40
Bricklayer's labourer 2:1	* 0.6000	6.000	Hour	3.60
Engineering Brick - Type B	* 0.0630	260.000	1000	16.38
Mortar; Readymix 1:3	* 0.0230	95.000	m3	2.19

Description	Quantity	Rate	Un
Bricklayer	* 2.0000	17.000	H
Bricklayer's labourer 2:1	* 2.0000	6.000	H

Quants making up Item are automatically calculated with omissions easily entered into the Take off Pad (Not shown below)

F10 Brick / Block walling			
Times	Add	Deduct	Totals
2/2	18.000		27.000
	0.375		
2/2	9.600		14.400
	0.375		
2/2	0.200		0.300
	0.375		
2/2	1.050		1.575
	0.375		

The Project can then be Printed out in traditional BQ or As Fully Detailed Below

F10 Brickwork Blockwork

Class B Engineering bricks below DPC

A over 300mm wide 43 m2 44.64 1919.52

Item Build-up		* 1.000			
Description		Quantity	Rate	Unit	Unit Price
Bricklayer	*	1.2000	17.000	Hour	20.40
Bricklayer's labourer 2:1	*	0.6000	6.000	Hour	3.60
Engineering Brick - Type B	*	0.0630	260.000	1000	16.38
Mortar; Readymix 1:3	*	0.0230	95.000	m3	2.19

Setting out		* 0.045			
Description		Quantity	Rate	Unit	Unit Price
Bricklayer	*	2.0000	17.000	Hour	1.53
Bricklayer's labourer 2:1	*	2.0000	6.000	Hour	0.54

A Full Labour/ Plant / Break Down can be Printed out. Amendments to Prices / Rates can be Changed in seconds within Conquest.

<u>Job Resources for ROCK002</u>		02/11/09 15:27 Page : 1		
Labour	Unit	Rate	Quantity	Resource Cost
Concretor	Hour	12.000	77.713	932.556
Concrete Ganger	Hour	14.000	10.192	142.688
Bricklayer	Hour	17.000	421.611	7167.387
Bricklayer's labourer 2:1	Hour	6.000	205.667	1234.002
+Joiner	Hour	16.500	621.175	10249.388
+Joiner's labourer 1 in 5	Hour	2.000	553.615	1107.230
General Labour	Hour	12.000	229.936	2759.232
+General Labour Driver	Hour	12.000	31.800	381.600
+General Labour Pavior	Hour	14.500	39.040	566.080
+Reinforcement Fixer	Hr	18.000	26.940	484.920
			<u>2217.689</u>	<u>25025.083</u>
Plant	Unit	Rate	Quantity	Resource Cost
4T Tracked Excavator inc driver	Hour	19.000	106.017	2014.323
Vibrating plate	Hour	1.000	14.080	14.080
3T 4 WD Hydraulic Tip Dumper	Hour	7.000	39.050	273.350
Skip 4.5 m3	no	31.000	154.000	4774.000
Vibrating Poker	Week	26.000	0.529	13.754
Powerfloat	Week	35.000	0.750	26.250
+Powerfloat Blades	Buy	85.000	0.750	63.750
+Concrete Pump	Day	480.000	0.529	253.920
Mechanical tamp	Week	65.000	2.529	164.385
+Neat Deck Safety		8.000	145.000	1160.000
+Formwork 150mm	m	1.500	110.000	165.000
			<u>573.234</u>	<u>8922.812</u>
Material	Unit	Bill Rate	Quantity	Resource Cost
D: AGGREGATES				
Hardcore; M.O.T. Type 1	t	12.500	101.250	1265.625

A Full Schedule can be Printed off "Shopping List" detailing Man Hours and Costs allowed for the whole Project along with Plant Requirements and Materials as used in the Estimate

F: BRICKS				
Engineering Brick - Type B	1000	260.000	2.709	704.340
				<u>704.340</u>
F: BLOCKS				
+Tarmac Durox 7.0N/mm2 100mm	m2	6.500	484.050	3146.325
+Tarmac Durox Solid 7.0N/mm2 140mm	m2	10.000	51.450	514.500
				<u>3660.825</u>
F: BRICK ACCESSORIES				
+Ancon HRT4	100	45.000	14.165	637.425
+Ancon PPS	100	45.000	0.494	22.230
+Insulation Discs	100	20.520	10.658	218.702
Staifix Starter Tie Pack Of 10 No	Pack	5.810	13.440	78.086
Manthorpe; Weep Vent 9 x 65mm Brown G950	nr	0.490	44.000	21.560
Hepworth; Elec Meter Box - White Mb1Wh	nr	40.000	3.075	123.000
Bricktor reinforcement 64mm wide	m	1.100	76.650	84.315
				<u>1185.318</u>

All of the Printed Documents can be issued in Excel 2003 , and with some manipulation the Excel files can be used for Monthly valuation purposes.

The above are only a snap shot of what reports Conquest can produce.